SPEAKMAN COMPANY

S-1553 Installation, Maintenance & Operation Instructions

TUB SPOUT

DESCRIPTION

Speakman polished chrome plated brass tub spout.

SPECIFICATIONS

3/4” NPT FEMALE INLET
3/4” x 1/2” NPT BRASS FLUSH BUSHING SUPPLIED
SHIPPING WEIGHT: XXX LBS.

INSTALLATION

Apply teflon tape or pipe dope to threads and thread spout onto piping. Wrench tighten carefully. Check connection for leaks.

MAINTENANCE

The gleaming finish of your SPEAKMAN S-1553 tub spout can be cleaned by using mild soap and warm water. Dry immediately with a soft, clean cloth for best results.

ROUGH-IN MEASUREMENTS

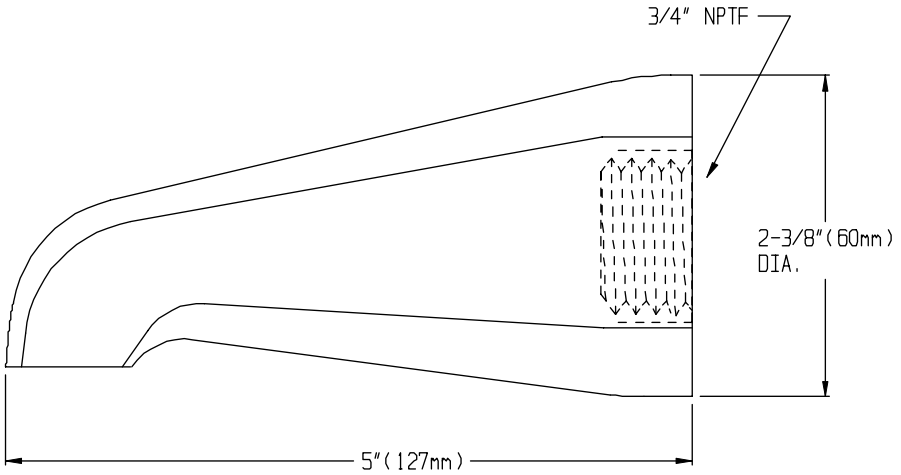

Product improvements may cause specification and dimensional changes without notice.

SPEAKMAN COMPANY
The Quality Leader Since 1869
P.O. Box 191, Wilmington, DE 19899-0191 USA
1-800-537-2107, Fax: 1-800-977-2747

04/00
92-1817