# **SPEAKMAN®**

## SENTINEL MARK II®



### Exposed Anti-Scald Balanced Pressure Showerpac &

#### **GENERAL SPECIFICATION**

Sentinel Mark II exposed anti-scald balanced pressure Showerpac. 18 gauge stainless steel outer shielding. Stainless steel self-draining soap dish. Chrome plated brass lever handle. Adjustable temperature limit stop. Brass valve body. Integral spring check stops. Pressure balancing & ceramic temperature regulating cartridge with built-in check valves. Concealed integral mounting lugs. S-2292 showerhead with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum to meet existing ASME A112.18.1/CSA B125.1 standard. 1/2" copper tube inlets through the wall or dropped from ceiling. Vandal-resistant construction. Valve only meets ASME A112.18.1/CSA B125.1 & ASSE 1016 standards.

#### □ S-1590-AF

Exposed anti-scald balanced pressure showerpac.

#### □ VPC-2

Stainless steel vertical pipe cover, 2 ft. sections.

NOTE: Must order as separate item.

#### **OPTIONS**

SUFFIX	DESCRIPTION
□ LH	Less showerhead
<b>1</b>	S-2251 showerhead
<b>2</b>	S-2252 showerhead
□ 2VR	S-2252 vandal-resistant showerhead
<b>□</b> 3	S-2253 showerhead
<b>5</b>	S-2272-E2 showerhead
<b>4</b> 6	S-2288 showerhead
□ LSD	Less soap dish


S-1590-AF



# **SPEAKMAN®**

### Rough-Ins

#### S-1590-AF

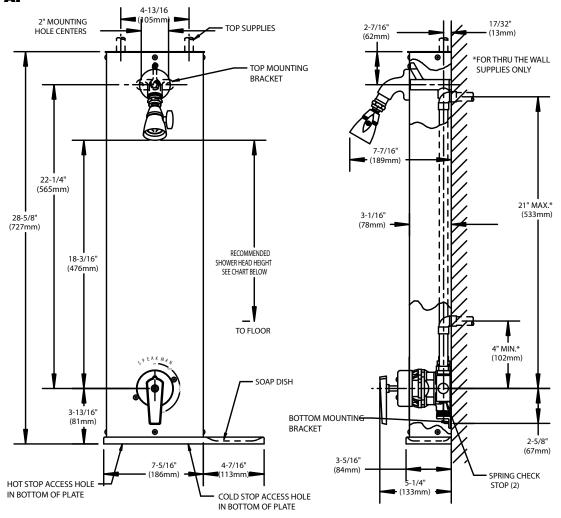

RECOMMENDED HEAD HEIGHTS		
MEN 6'0" (1. BOYS, SENIOR HIGH BOYS, JUNIOR HIGH BOYS, ELEMENTARY	.83 Meters) 5'10" (1.78 M eters) 5'6" (1.68 Meters) 5'4" (1.63 Meters)	
WOMEN 5'8" GIRLS, SENOIR HIGH GIRLS, JUNIOR HIGH GIRLS, ELEMENTARY	(1.73 Meters) 5'6" (1.68 Meters) 5'4" (1.63 Meters) 5'2" (1.58 Meters)	