

# SPEAKMAN®

9" RAIN SHOWERHEAD with 12 plunger nozzles that provide 96 spray streams for a full body coverage pattern of up to 12-14" diameter.

The base model is S-2759 and has a 1/2"-14 NPT standard thread to fit an existing plumbing tube.

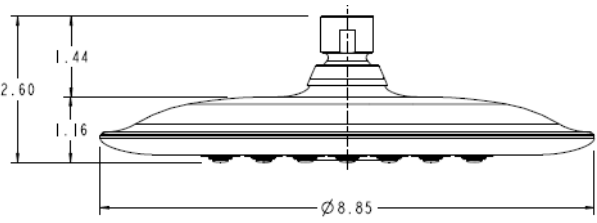
The model S2859 includes an 'S' shaped arm S-2530 that offers a higher mounting on the wall.

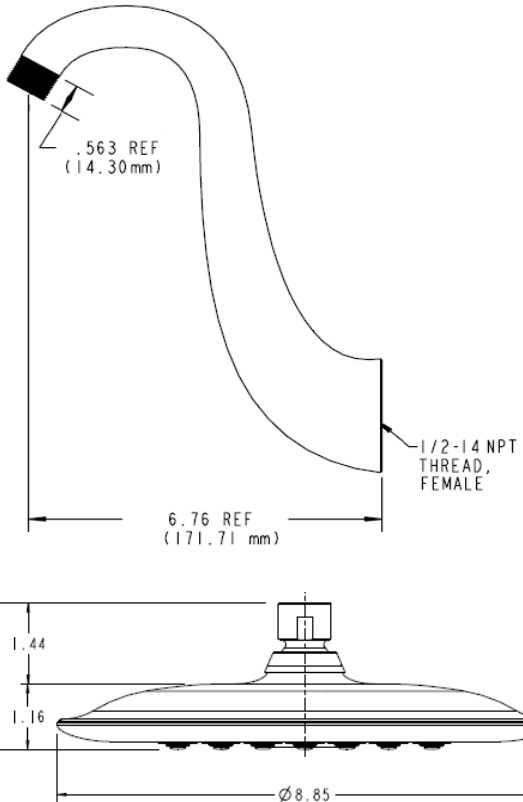
Both models have a pressure compensating AUTOFLO® device that reduces flow to maximum 2.5 GPM / 9.46LPM and meets existing ASME A112.18.1 requirements.

## Specifications:

SUPPLY INLET:	1/2"-14 NPT with the EZ Seal Connection
FLOW RATE:	2.5 GPM / 9.46 LPM max.
SHIPPING WEIGHT:	3.3 LBS (S-2759) and 4.6 LBS (S-2859)
DIMENSIONS:	Diameter: 8 -7/8", Thickness 1-1/8", Height: 2 -5/8"

## Speakman Models (S-2759) (S-2759-BN) (S-2759-ORB) & (S-2859) (S-2859-BN) (S-2859-ORB)

	Model	Finish	Description
	<b>S-2759</b>	Polished Chrome	Speakman 12-jet showerhead 2.5 GPM
	<b>S-2759 -BN</b>	Brushed Nickel	
<b>S-2759 -ORB</b>	Oil Rubbed Bronze		

	Model	Finish	Description
	<b>S-2859</b>	Polished Chrome	Speakman Arm S-2530
	<b>S-2859 -BN</b>	Brushed Nickel	+
<b>S-2859 -ORB</b>	Oil Rubbed Bronze		Speakman 12-jet showerhead 2.5 GPM

### **EZ Connection Installation Directions:**

Remove old showerhead by turning adapter of showerhead counterclockwise. Use pliers or strap wrench if necessary.

Clean any debris off the threads of the shower arm.

Turning in a clockwise direction, thread the new showerhead onto the shower arm. Hand tighten.

Check all threaded connections periodically to make sure they are tight.

**Note:** Damaged threads or non-standard shower arms may require Teflon tape for assembly.

### **Important Safeguards Reminder:**

Always avoid water streams when changing volume control setting. Sudden temperature change may occur.

Make sure all threaded connections are tight.

Avoid using harsh or abrasive cleaners.

### **Cleaning Instructions:**

Periodic use of mild soap and warm water will help keep your showerhead's appearance in its original condition. For best results, dry immediately with a soft, clean cloth.

In certain water conditions, mineral deposits may form.

To keep your showerhead like new and assist in breaking down excessive mineral deposits on the sprays, we recommend soaking the showerhead in (2) parts white vinegar and (1) part water for about 1/2 hour, depending on the amount of buildup. Rinse thoroughly.

Gently brush off with a toothbrush any remaining mineral deposits if necessary.

**Note:** Do not use harsh and/or abrasive cleaners on showerhead or arm.

On all special finish parts, including any of nickel or brass finishes, the white vinegar/water treatment should not be used

### **Limited 1 year Warranty:**

Speakman Company warrants to its purchasers that this product is free from defects in material and workmanship for a period of one year from the date of purchase and if determined to be defective can at Spearman's sole option be replaced or repaired provided the product has not been abused, misused, altered or damaged after purchase. Entire warranty available from Speakman Company.

Designed and Engineered at Speakman Company, New Castle, Delaware, USA

Manufactured to Speakman engineering specifications in USA.

Speakman Company P.O. Box 191 Wilmington, DE 19899

8" Downpour Rain Showerhead, Autoflo, and Speakman are trademarks of the Speakman Company, Inc. Wilmington DE 19899

©2006 Speakman Company, Inc.