

SENSORFLO®

S-8700
S-8701



S-8710
S-8711



S-8720
S-8721



Battery Powered Lavatory Faucet

GENERAL SPECIFICATION

Polished chrome plated. Solenoid with built-in filter. Two 3-volt DC lithium batteries with waterproof connectors housed above-counter in spout. Spout consists of all metal chassis and removable cover. Low battery warning light. Vandal-resistant 60-second time out feature. Water conserving vandal-resistant flow control reduces flow to 2.2 gpm/8.4 lpm. To meet existing ASME A112.18.1/CSA B125.1 standard.

NOTE: Stainless steel flexible supply hose(s), 3/8" compression, to supply stop(s) not included, see options below.

☐ **S-8700**

Single basin low profile faucet.

☐ **S-8701**

Single basin low profile faucet, under counter mechanical mixer with built-in backflow check valves.

☐ **S-8710**

Low profile faucet with 4" deck plate.

☐ **S-8711**

Low profile faucet with 4" deck plate, under counter mechanical mixer with built-in backflow check valves.

☐ **S-8720**

Low profile faucet with 8" deck plate.

☐ **S-8721**

Low profile faucet with 8" deck plate, under counter mechanical mixer with built-in backflow check valves.

OPTIONS



SUFFIX	DESCRIPTION
<input type="checkbox"/> BO	0.5 gpm flow control, vandal-resistant
<input type="checkbox"/> CA**	No lead for CA AB1953 compliance
<input type="checkbox"/> GB	1.5 gpm flow control, vandal-resistant
<input type="checkbox"/> HS	Two (2) stainless steel flexible supply hoses to supply stops
<input type="checkbox"/> HTS	One (1) stainless steel hose for tempered water systems (S-8700, S-8710, & S-8720 only)
<input type="checkbox"/> LF	2.2 gpm laminar flow control outlet
<input type="checkbox"/> TMV	Under counter thermostatic mixing valve (S-8700, S-8710, & S-8720 only)
<input type="checkbox"/> VRS	Vandal-resistant screws for removable cover and custom wrench

** The following options are not available with the "CA" option:
HS (Hose & Spray), SO, TVVI, VB6, VB8, ST, SVV, & TMV.


This space for Architect/Engineer approval.




Rough-Ins

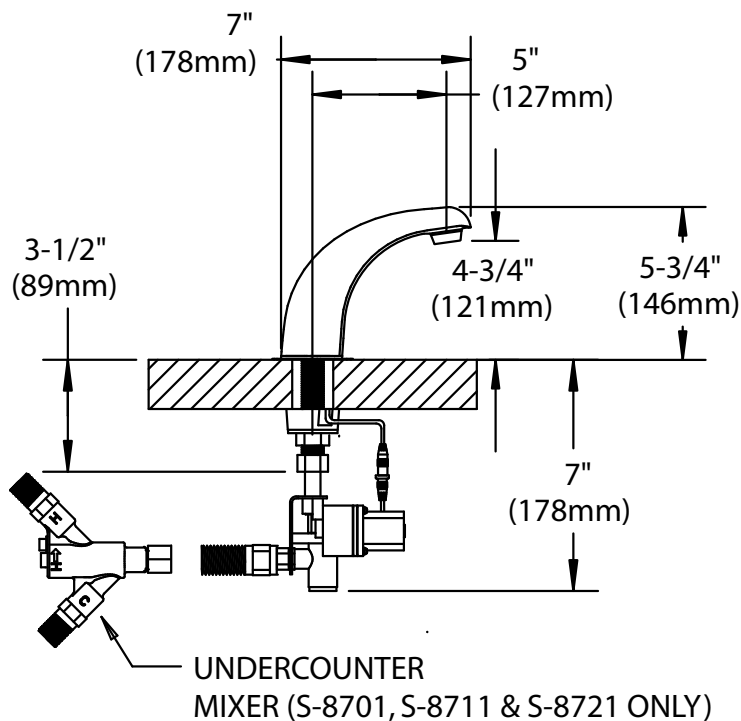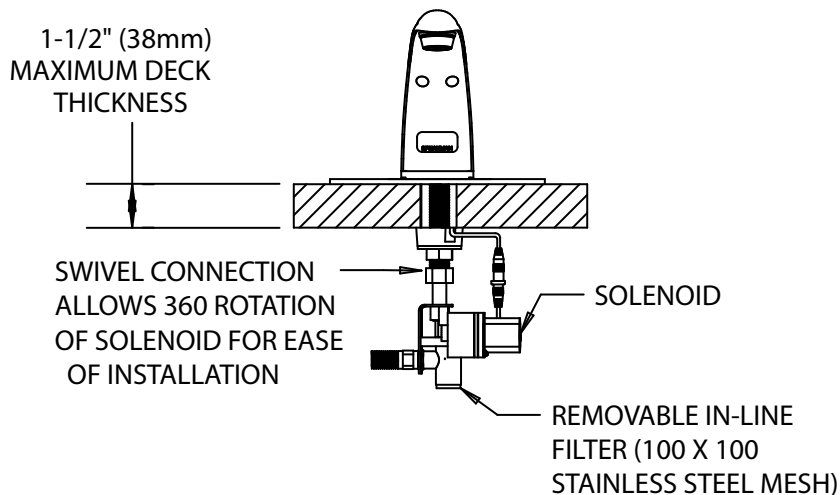


S-8700 S-8701

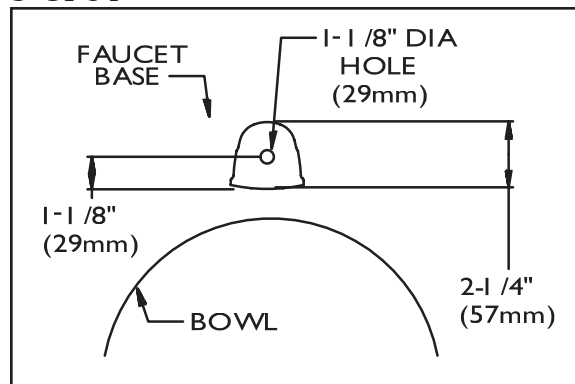

S-8710 S-8711

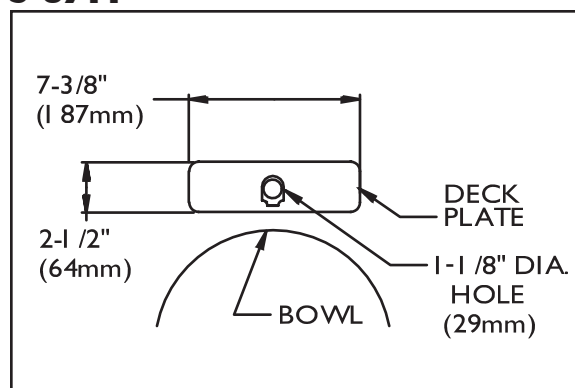

S-8720 S-8721

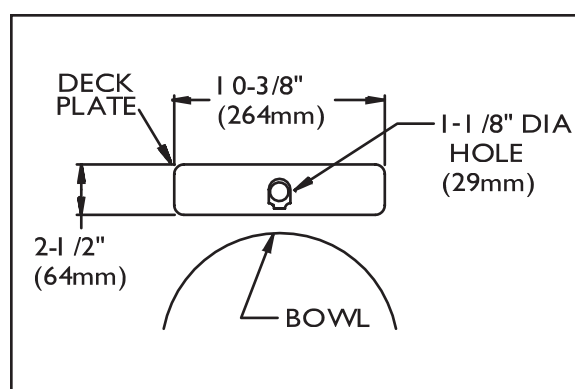

NOTE: Position faucet as close to the edge of the sink as possible. Ensure adequate clearance for wire protector, wires, washers and nut. Unless otherwise specified, all inlets are 3/8 compression with male threads. Unless otherwise specified, all dimensions are in inches and are subject to change without notice.