SPEAKMAN®

COMMANDER®



SC-5722-REV



Deck Mounted Kitchen Sink Fittings

GENERAL SPECIFICATION 👆

Polished chrome plated Commander 8" deck fitting with 1/4 turn ceramic cartridges covered by a 25-year warranty. Brass body with rigid shanks. Accomodates installations up to 3/4" thick. 8" deep gooseneck spout, rigid or swivel. Vandal-resistant flow control reduces flow to 2.2 gpm/8.4 lpm. Meets ASME A112.18.1/CSA B125.1 and NSF61.

□ SC-5722

Vandal-resistant lever handles with color-coded indexes.

□ SC-5722-REV

Vandal-resistant revere lever handles with color-coded indexes.

OPTIONS

SUFFIX	DESCRIPTION	
	0.5 gpm flow control, vandal-resistant	
□ CA**	No lead for CA AB1953 compliance	
□ FC*	2.0 gpm laminar flow control, plain end spout	
☐ GB	1.5 gpm flow control, vandal-resistant	
□ HS	Hose and spray attachment	
	2.2 gpm laminar flow control outlet	
□ MI	Metal index for handles (S-5722 only)	
	Rose spray outlet	
□ 4*	3-3/4" deep spread gooseneck spout, rigid or swivel	
□ 5*	5-1/4" deep spread gooseneck spout, rigid or swivel	
□ 9*	9" deep tubular swing spout, rigid or swivel	
□ 12*	12" deep tubular swing spout, rigid or swivel	
□ VB6*	6" deep spread rigid vacuum breaker spout	
□ VB8*	8" deep spread rigid vacuum breaker spout	

VACUUM BREAKER OPTIONS

SUFFIX	DESCRIPTION	
□ ST □ SW	Serrated tip Swivel spout	

This space for Architect/Engineer approval.







^{*}See page 213 for optional spout specifications

^{**} The following options are not available with the "CA" option: SO, TWI, VB6, VB8, ST, SW, & TMV.

SPEAKMAN®

Rough-Ins

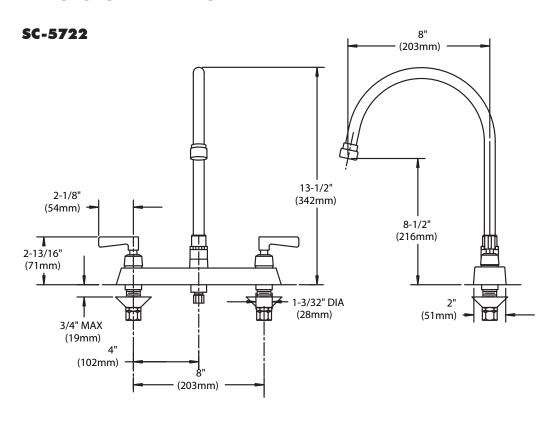

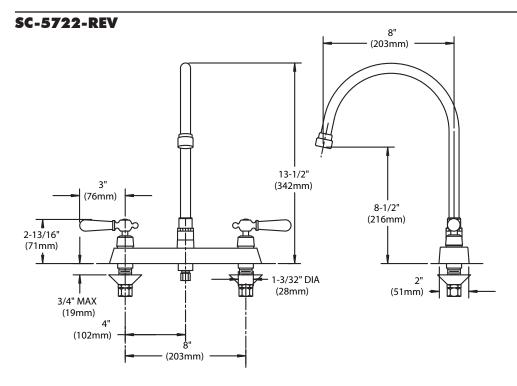


SPEAKMAN®



Spout -4, rigid or swivel 3-3/4" deep gooseneck



Spout -4FC, rigid or swivel 3-3/4" deep plain end gooseneck; laminar flow in base of spout



Spout -9, rigid or swivel 9" deep tubular swing spout





Spout -5, rigid or swivel 5-1/4" deep gooseneck




Spout -5FC, rigid or swivel 5-1/4" deep plain end gooseneck; laminar flow in base of spout



Spout -12, rigid or swivel 12" deep tubular swing spout







Spout -8FC, rigid or swivel 8" deep plain end gooseneck; laminar flow in base of spout



Spout -VB6, rigid 6" deep rigid vacuum breaker spout

