

SPEAKMAN®

SE-220

LIFESAVER® EMERGENCY SHOWER

DESCRIPTION

The SE-220 Lifesaver® Emergency Shower features an impeller action yellow Cylolac® shower head with a vertical overhead supply. The unit is activated with a 1" stay-open ball valve operated by a high visibility yellow pull rod.

SPECIFICATIONS

Showerhead: 8" Cylolac® yellow plastic

Flow Control: Internal 20 gpm regulator

Valve: 1" NPT female brass, chrome-plated, stay-open valve

Activator: Powder coated yellow, aluminum triangular pull rod

Inlet: 1" NPT female


Performance: 20 gpm @ 20 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- ☐ 30GPM 30gpm regulator
- ☐ BH Brass showerhead
- ☐ FLW Flow switch
- ☐ HS Hand-held spray
- ☐ PSS Polished stainless steel finish
- ☐ SCV Self-closing valve
- ☐ SPR Stainless steel pull rod
- ☐ SSBV Stainless steel ball valve
- ☐ SSH Stainless steel showerhead
- ☐ XPR Extended aluminum pull rod

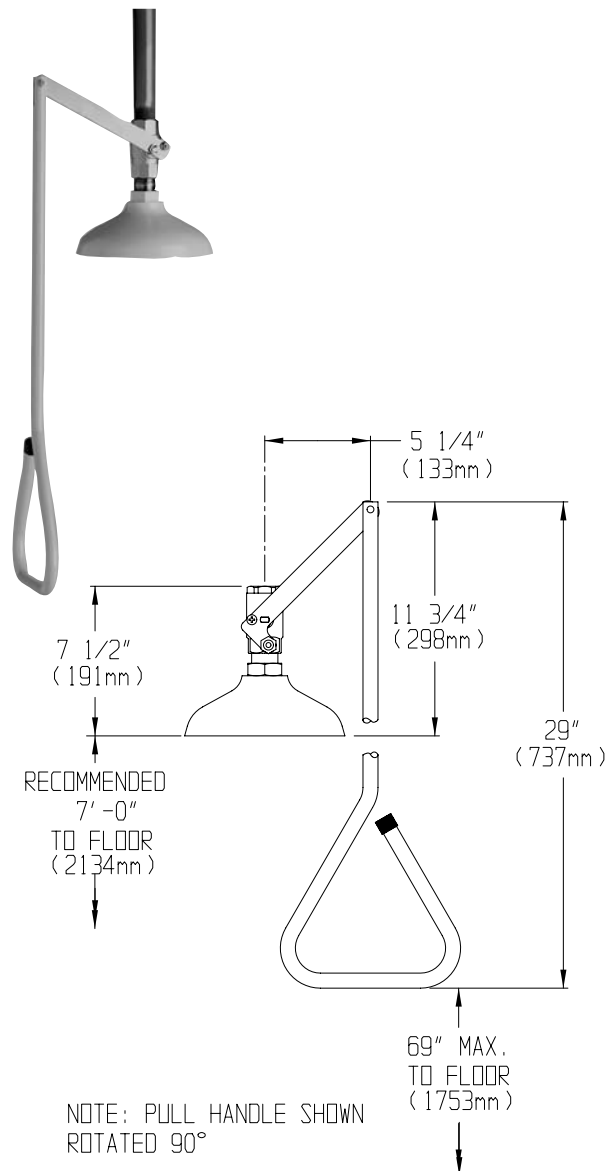

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____