

SPEAKMAN®

SE-225

LIFESAVER® EMERGENCY SHOWER

DESCRIPTION

Emergency deluge shower supplied with self-closing valve, activated by pull chain and ring.

SPECIFICATIONS

SHOWER HEAD: 8" Dia. CYCOLAC® Yellow Plastic.

FLOW CONTROL: Internal 20 gpm Restrictor

VALVE: 1" NPT Female Brass, Chrome-Plated. Self-Closing Valve

ACTIVATOR: 8" Stainless Steel Ring, #3 Stainless Steel Loop Chain

INLET: 1" NPT Female


Performance: 20 gpm @ 20 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- ☐ FLW Flow switch
- ☐ PC Polished chrome showerhead
- ☐ BH Brass showerhead
- ☐ SSH Stainless steel showerhead
- ☐ FPV Anti-freeze protection valve
- ☐ SPV Anti-scald protection valve
- ☐ VPL Vapor proof light

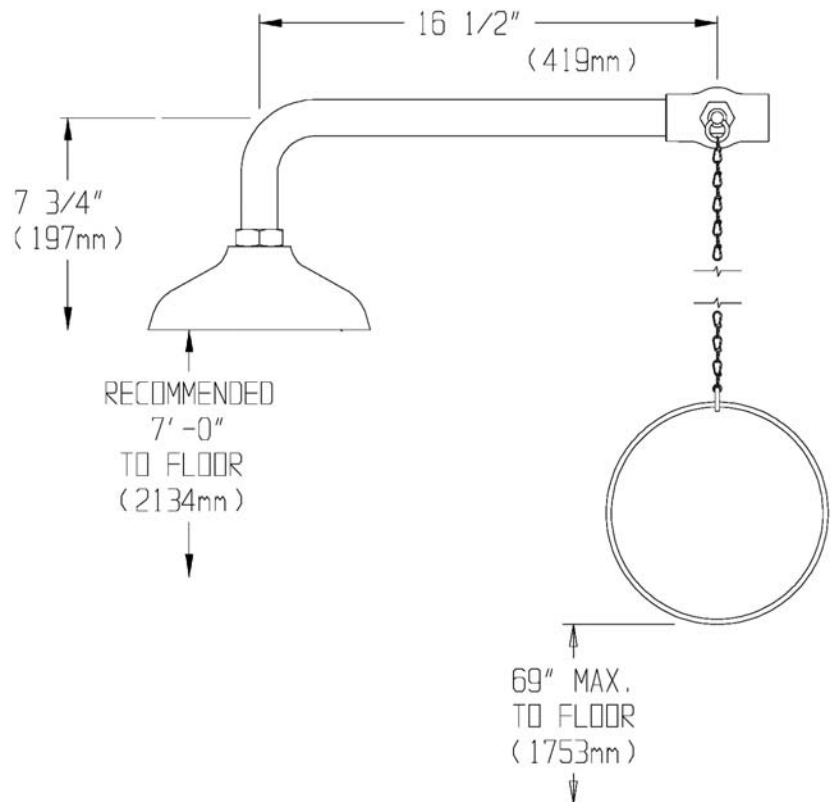

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____