SPEAKMAN® SE-226

LIFESAVER® EMERGENCY SHOWER

DESCRIPTION

The SE-226 Lifesaver® Emergency Shower features an impeller action yellow Cycolac® shower head with a horizontal overhead supply. The unit is activated with a 1" stay-open ball valve operated by a stainless steel pull rod.

SPECIFICATIONS

Showerhead: 8" Cycolac® yellow plastic Flow Control: Internal 20 gpm regulator Valve: 1" NPT female brass, chrome-plated,

stay-open valve

Activator: 8" stainless steel ring, #3 stainless steel loop chain (ON). 3" stainless steel ring, #3 stainless steel loop

chain (OFF)


Inlet: 1" NPT female


Performance: 20 gpm @ 20 psi Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- ☐ 30GPM 30gpm regulator ☐ BH Brass showerhead
- ☐ FLW Flow switch
- ☐ FPV Anti-Freeze protection valve
- SCV Self-closing valve
- SPR Stainless steel pull rod
- ☐ SPV Anti-Scald protection valve
 ☐ SSBV Stainless steel ball valve
- SSH Stainless steel showerhead
- ☐ VPL Vapor proof light

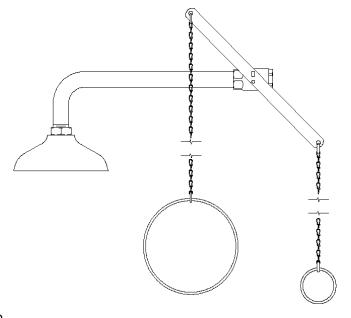



Job Name
Location
Architect/Engineer
Sales Representative
Wholesaler
Date Model #