

# **SPEAKMAN®**

## **SE-231**

### **LIFESAVER® EMERGENCY SHOWER**

#### DESCRIPTION

Emergency deluge shower supplied with self-closing valve activated by chain, and flange for attachment to wall or floor.

#### SPECIFICATIONS

**Showerhead:** 8" dia. cyclac® yellow plastic

**FLOW CONTROL:** Internal 20 gpm Restrictor.

**VALVE:** 1" NPT Female Brass, Chrome-Plated. Self-Closing Valve.

**ACTIVATOR:** #3 Stainless Steel Loop Chain, 102" Long.

**INLET:** 1" NPT Female.

**FLANGE:** Brass, Chrome-Plated.

**PIPE:** 1" IPS Galvanized Steel.


**Performance:** 20 gpm @ 20 psi

**Compliance:** ANSI Z358.1

**Universal Emergency Sign Included**

#### OPTIONS

- ☐ FLW Flow switch
- ☐ PC Polished chrome showerhead
- ☐ BH Brass showerhead
- ☐ SSH Stainless steel showerhead
- ☐ FPV Anti-freeze protection valve
- ☐ SPV Anti-scald protection valve
- ☐ VPL Vapor proof light

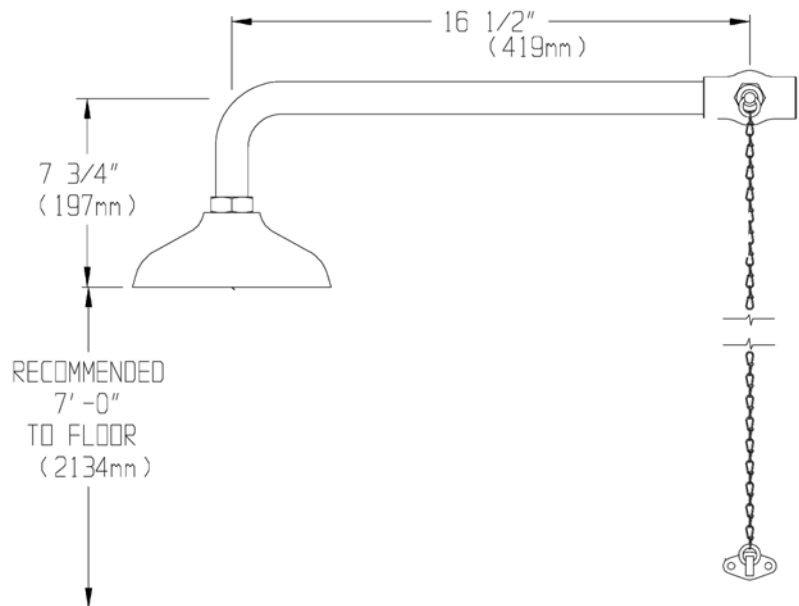

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____