SPEAKMAN® SE-236

LIFESAVER® EMERGENCY SHOWER

DESCRIPTION

The SE-236 Lifesaver® Emergency Shower features a concealed ceiling mounted impeller action chrome-plated shower head with a horizontal supply. The unit is activated with a 1" stay-open ball valve operated by a stainless steel ring attached via a stainless steel chain.

SPECIFICATIONS

Showerhead: 10" flush mounted, polished chrome plated

Flow Control: Internal 20 gpm regulator Valve: 1" NPT female brass, chrome-plated,

stay-open valve

Flange: Brass, chrome plated Pipe: 1" IPS galvanized steel


Activator: Stainless steel chain and ring

Performance: 20 gpm @ 20 psi Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- ☐ 30GPM 30gpm regulator
- ☐ FLW Flow switch
- ☐ SSBV Stainless steel ball valve
- ☐ SSH Stainless steel showerhead

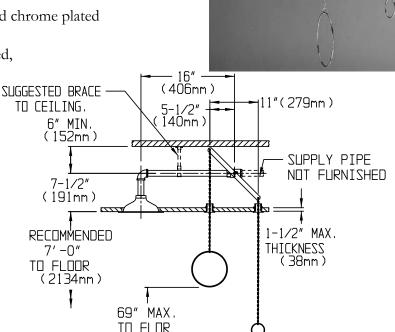

(1753mm)

Job Name	
Location	
Architect/Engineer	
Sales Representative	
Wholesaler	
Date	Model #