

SPEAKMAN®

SE-237-SR

SAFE-T-ZONE® EMERGENCY RECESSED WALL SHOWER

DESCRIPTION

Emergency deluge shower unit with wall recessed activator. Shower is supplied with a 1" NPTF stay-open full flow ball valve that is activated by pull handle that is recessed inside wall cabinet.

SPECIFICATIONS

Showerhead: Brass, 10" diameter flanged polished chrome plated

FLOW CONTROL: 18 Gauge (0.048 thk.) stainless steel

VALVE: 1" NPT Female Brass, Chrome-Plated. Full flow stay-open ball valve

ACTIVATOR: Stainless steel lever with black plastic rotating handle

INLET: 1" NPTF


Performance: 20 gpm @ 20 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- ☐ 30GPM 30 gpm flow control
- ☐ FLW Flow switch
- ☐ SSH Stainless steel showerhead

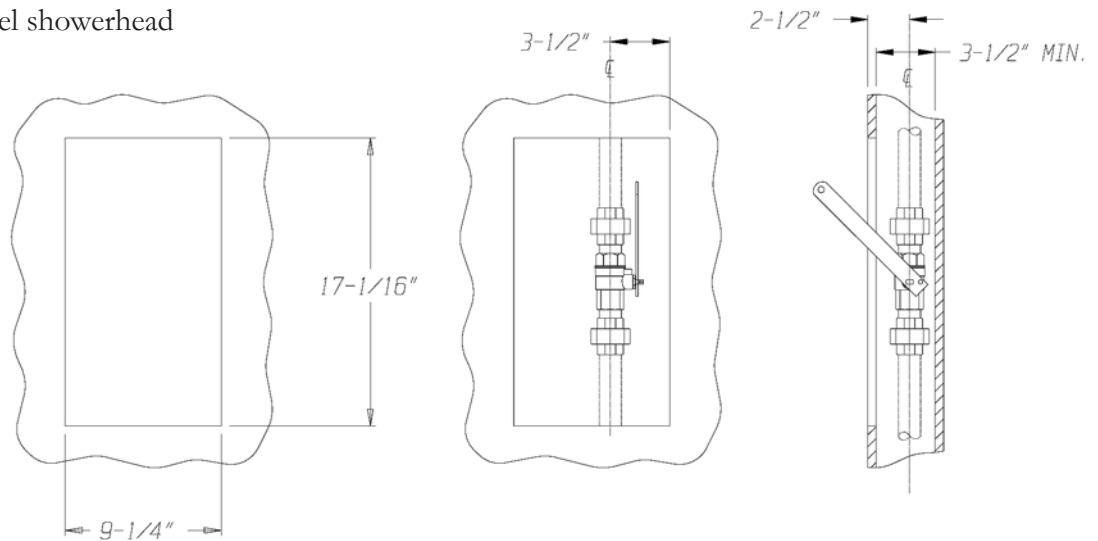

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____