SPEAKMAN®

SE-250

LIFESAVER® EMERGENCY SHOWER

DESCRIPTION

Floor mounted emergency deluge shower supplied with self-closing valve activated by pull chain and ring.

SPECIFICATIONS

showerhead: 8" dia. cycolac® yellow plastic
FLOW CONTROL: Internal 20 gpm Restrictor.
VALVE: 1" NPT Female Brass, Chrome-Plated. Self-Closing Valve.
ACTIVATOR: 8" Dia. Stainless Steel Ring, #3 Stainless Steel Loop Chain.
STANCHION: 1-1/4" IPS Steel Piping
INLET: 1-1/4" NPT Female
FLOOR FLANGE: Brass Casting with (3) 17/32" Dia. Mounting Holes on 9" Dia. Bolt Circle, Spaced 120° Apart.
Performance: 20 gpm @ 20 psi
FINISH: DuraJade™
Compliance: ANSI Z358.1
Universal Emergency Sign Included

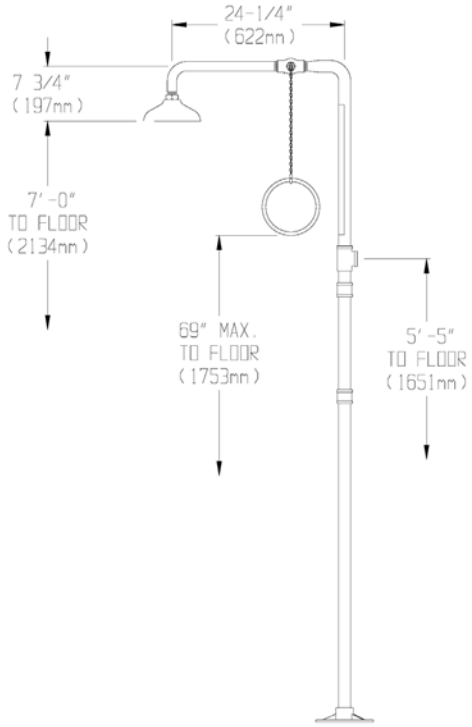

OPTIONS

- ❑ FLW Flow switch
- ❑ PC Polished chrome showerhead
- ❑ BH Brass showerhead
- ❑ SSH Stainless steel showerhead
- ❑ FPV Anti-freeze protection valve
- ❑ SPV Anti-scald protection valve
- ❑ VPL Vapor proof light

Job Name_____

Location_____

Architect/Engineer _____

Sales Representative _____

Wholesaler _____

Date_____ Model # _____

400 Anchor Mill Road, New Castle, DE 19720 USA
1-800-537-2107 | Fax: 1-800-977-2747
WWW.SPEAKMANCOMPANY.COM

Revision Date
AUG. 2011