

SPEAKMAN®

SE-364

THERMOSTATIC MIXING VALVE

DESCRIPTION

25 gpm capacity supports a single shower or multiple eyewash stations and provides a 21 gpm cold water by pass in case of hot water or thermostatic element failure. Complete with cabinet, check and ball valves.

SPECIFICATIONS

Inlet: 1/4" NPT

Outlet: 1/4" NPT

Cold Water Inlet: 1/4" NPT Union

Tempered Water Outlet: 1/4" NPT Union

Temp. Range: 70°-90°

Set Point: 85°

Stainless Body: 18 Ga.

Stainless Door: 18 Ga.

Stainless Finish: Type 304 with no. 4 finish


Carbon Steel Body: 16 Ga.

Carbon Steel Door: 16 Ga.

Carbon Steel Finish: Baked enamel finish

OPTIONS

- Recessed Cabinet
- Semi-Recessed Cabinet
- Surface Cabinet
- Stainless Material
- Carbon Steel Material

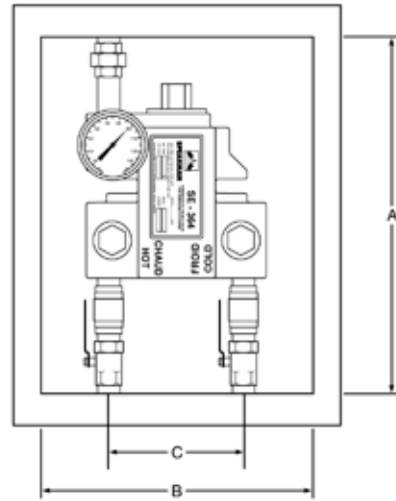

DIMENSIONS:

Cabinet Style	A	B	C	D
Recessed	23"	19"	5"	6 ³ / ₄ "
Surface Mounted	23"	19"	5"	6 ³ / ₄ "

CAPACITIES - MODEL SE-364

Pressure Drop PSI	5	10	20	30	45
Tempered Flow	9	13	17	25	27
Cold Water Bypass	7	10	14	21	22



ASSE 1071 Approved

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____