


SPEAKMAN™

Thermostatic Mixing Valve SE-370

SPECIFICATION

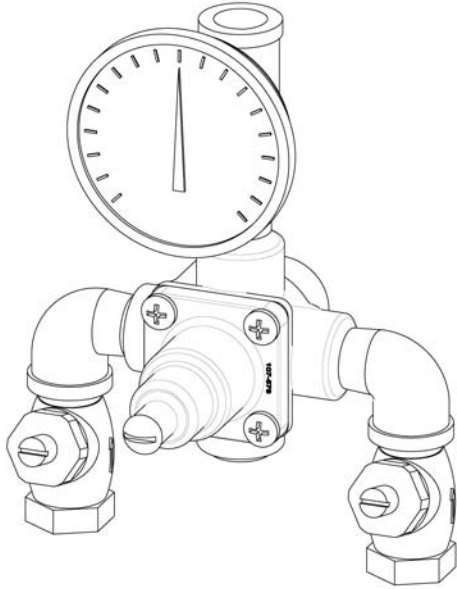

FEATURES:

- 7 gpm capacity supports most single eye or eye/face wash stations
- Provides 5 gpm cold water bypass in case of hot water or thermostatic element failure
- Inlet Connections: 1/2" NPT
- Outlet Connection: 1/2" NPT
- Temperature Range: 65°-95° F
- Maximum Pressure 125 PSI
- Inlet Temperature Hot: 120°-180° F
- Inlet Temperature Cold: 33°-80° F
- Minimum Temperature Differential (from valve set point): 20° F

COMPLIANCE:

- ASSE 1071 approved


 **ASSE 1071 Approved**

AVAILABLE FINISHES:

- Rough brass (standard)

WARRANTY:

- 1 year limited

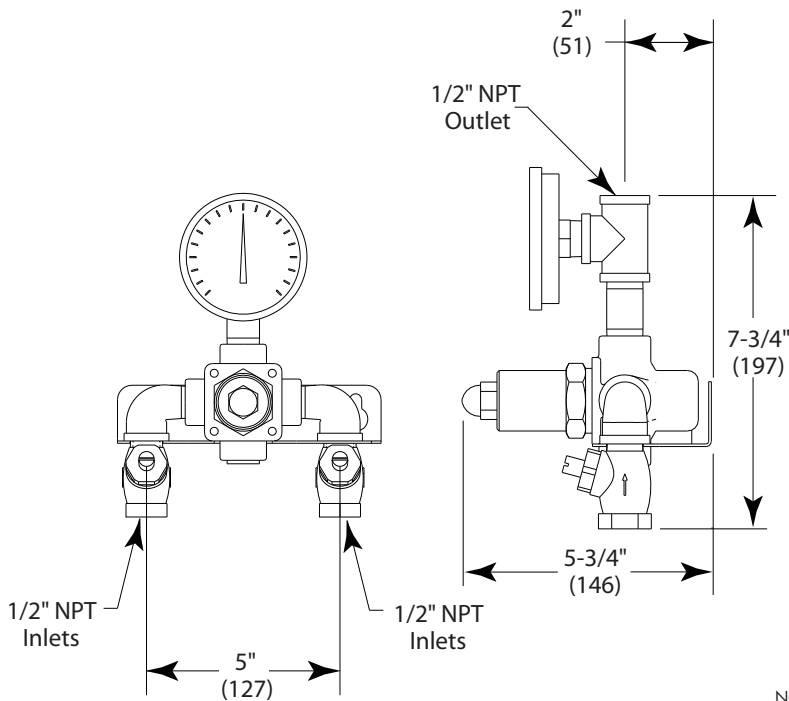

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
P: 800-537-2107 | F: 800-977-2747
WWW.SPEAKMANCOMPANY.COM



REVISION DATE: SEPT. 2011