SPEAKMAN®

SE-571

EYESAVER® EYEWASH

DESCRIPTION

Deck mounted emergency eyewash. Supplied with stay-open full flow ball valve; activated by stainless steel push handle; twin spray heads with individual flow restrictors, and flip-off dust covers. Unit mounts on counter tops up to 1-1/4" thick.

SPECIFICATIONS

SPRAY HEADS: (2) Aerated, Yellow ABS Plastic Spray Outlets, Spray face, and Dust Cover.
VALVE: 1/2" NPT Female Brass, Chrome-Plated.
ACTIVATOR: Stainless Steel Push Handle.
INLET: 1/2" NPSM.
Performance: 3.6 gpm @ 30 psi
Compliance: ANSI Z358.1
Universal Emergency Sign Included

OPTIONS

- ❑ FLW Flow switch
- ❑ ILS In-line strainer
- ❑ FPV Anti-freeze protection valve
- ❑ SPV Anti-scald protection valve
- ❑ VPL Vapor proof light

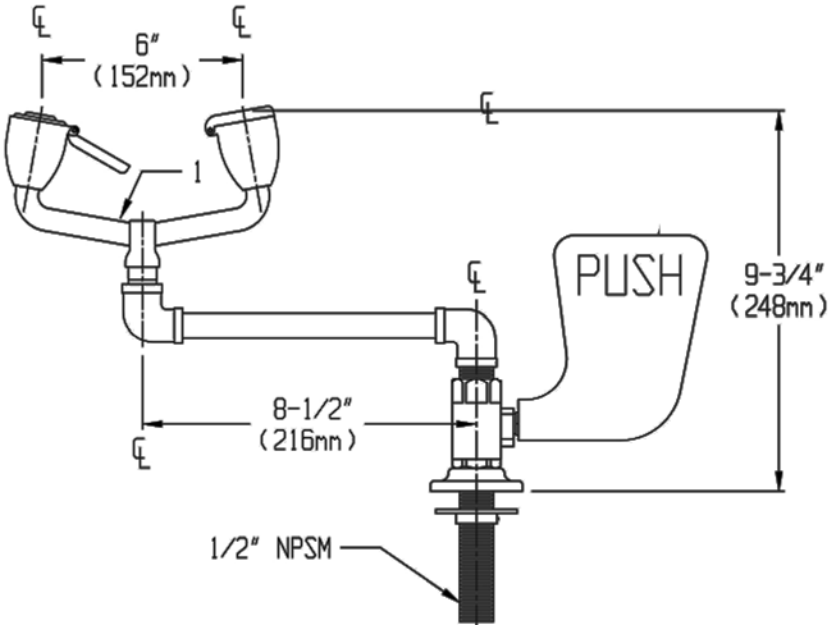

Job Name_____

Location_____

Architect/Engineer _____

Sales Representative _____

Wholesaler _____

Date_____ Model # _____

400 Anchor Mill Road, New Castle, DE 19720 USA
1-800-537-2107 | Fax: 1-800-977-2747
WWW.SPEAKMANCOMPANY.COM

Revision Date
AUG. 2011