

SPEAKMAN®

SE-601

SAFE-T-ZONE® EMERGENCY SHOWER AND EYE/FACE WASH

DESCRIPTION


Floor mounted emergency deluge shower and aerated eye/face wash combination unit. Shower is supplied with a 1" NPTF self-closing valve, activated by a pull chain and ring. Eye/face wash is supplied with 1/2" NPTF stay-open full flow ball valve, activated by push handle.

SPECIFICATIONS

- Showerhead:** 8" dia. cyclac® yellow plastic.
- Flow control:** Internal 20 gpm regulator.
- Valve:** 1" NPT female brass, chrome-plated. Self-closing valve.
- Activator:** 8" dia. stainless steel ring.
- Stanchion:** 1-1/4" IPS steel piping with brass fittings.
- Inlet & waste:** 1-1/4" NPT female.
- Floor flange:** Brass casting with (3) 17/32" dia. mounting holes on 9" dia. bolt circle, spaced 120° apart.
- Finish:** DuraJade™

EYE/FACE WASH: SE-400

- Bowl:** 300 series stainless steel
- Spray Heads:** (6) brass, chrome-plated aerators, plastic covered brass bodies
- Valve:** 1/2" NPT female brass, chrome-plated
- Activator:** Stainless steel push handle
- Inlet:** 1/2" NPT female
- Strainer:** Brass, chrome-plated, in-line
- Performance:** 9.3 gpm @ 30 psi
- Compliance:** ANSI Z358.1
- Universal Emergency Sign Included**

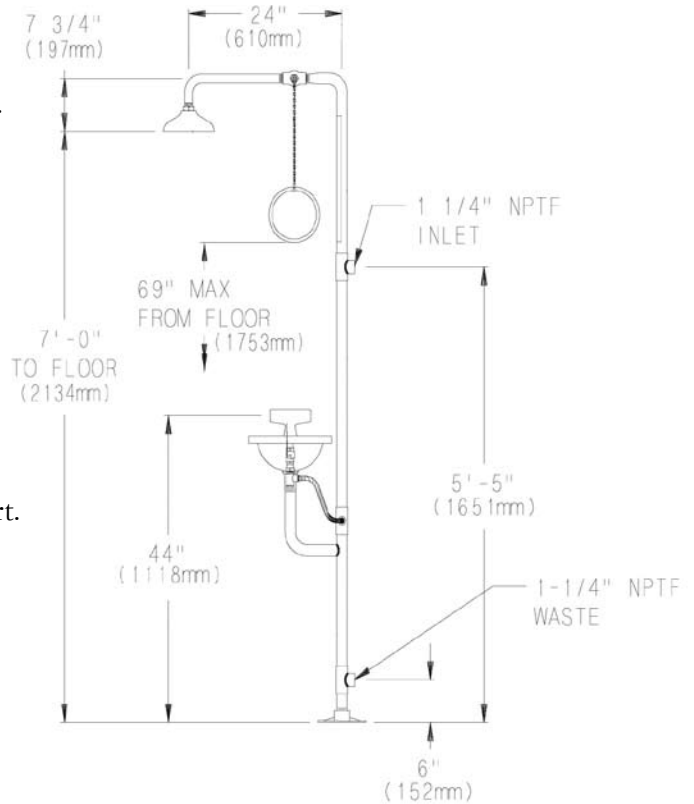

OPTIONS

- HFO Hand foot operation
- FPV Freeze protection valve
- SPV Scald protection valve
- FLW Flow switch
- HS Hand held spray
- TS Top supply
- SSH Stainless steel showerhead
- SSBV Stainless steel ball valves
- BH Chrome plated brass showerhead

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____