

# SPEAKMAN®

## SE-607

### SAFE-T-ZONE® EMERGENCY SHOWER AND EYE/FACE WASH

#### DESCRIPTION

The SE-607 Safe-T-Zone® features a floor mounted emergency deluge shower and aerated eye/face wash combination unit. Shower is supplied with a 1" NPTF stay-open full flow ball valve, activated by triangular pull handle. Eye/face wash is supplied with 1/2" NPTF stay-open full flow ball valve, activated by push handle and/or foot pedal.

#### SPECIFICATIONS

**Showerhead:** 8" Cylolac® yellow plastic

**Flow Control:** Internal 20 gpm regulator

**Valve:** 1" NPT female brass, chrome plated.

Full flow stay open ball valve.

**Activator:** Stainless steel tube

**Stanchion:** 1 1/4" IPS steel piping with brass fittings

**Inlet & Waste:** 1 1/4" NPT female

**Floor & Flange:** Brass casting with (3) 17/32" dia. mounting holes on 9" dia. bolt circle, spaced 120° apart

**Finish:** DuraJade™™

**Performance:** 20 gpm @ 20 psi flowing

**EYE/FACE WASH: SE-400**

**Bowl:** 300 series stainless steel or yellow plastic

**Spray Heads:** (6) brass, chrome-plated aerators, plastic covered brass bodies

**Valve:** 1/2" NPT female brass, chrome-plated.

**Activator:** Stainless steel push handle.

**Shrouds:** Yellow polypropylene.

**Inlet:** 1/2" NPT female.

**Strainer:** Brass, chrome-plated, in-line.


**Performance:** 9.3 gpm @ 30 psi

**Compliance:** ANSI Z358.1

**Universal Emergency Sign Included**

#### OPTIONS

- 30GPM 30gpm regulator
- XPR Extended pull rod
- FLW Flow switch
- HS Hand-held spray
- PC Polished chrome showerhead
- BH Brass showerhead
- SSH Stainless steel shower hand
- FPV Freeze protection valve
- SSBV1 1" stainless steel valve
- SSBV2 1/2" stainless steel valve
- TS Top supply
- SPV Scald protection valve

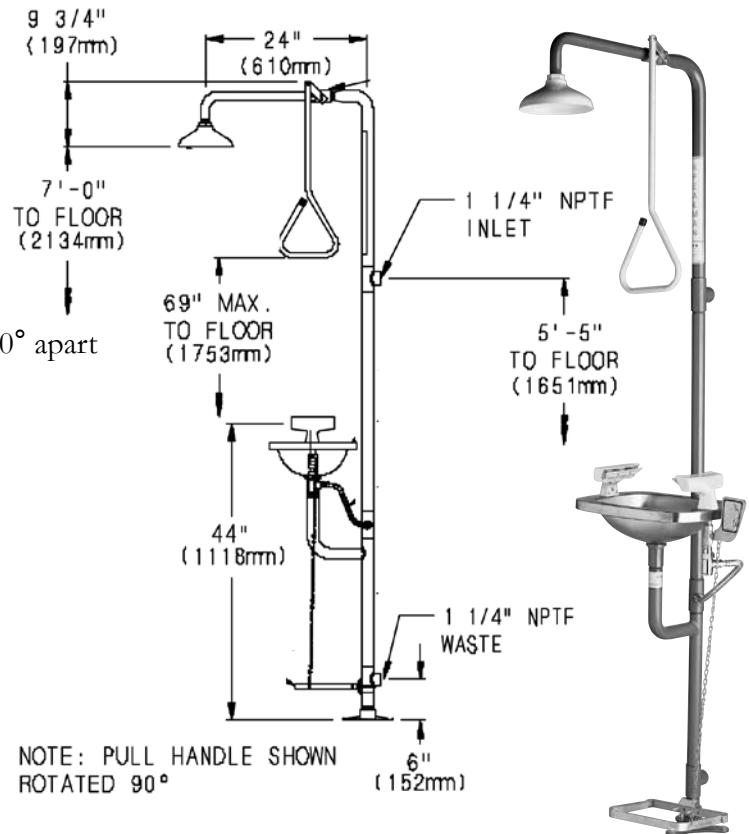

Job Name	_____
Location	_____
Architect/Engineer	_____
Sales Representative	_____
Wholesaler	_____
Date	_____
Model #	_____