

SPEAKMAN®

SE-614

SAFE-T-ZONE® EMERGENCY SHOWER AND EYEWASH

DESCRIPTION

Floor mounted emergency deluge shower and aerated eyewash combination unit. Shower is supplied with a 1" NPTF self-closing full flow ball valve, activated by pull chain and ring. Eyewash is supplied with 1/2" NPTF stay-open full flow ball valve, activated by trigger bar.

SPECIFICATIONS

Showerhead: 8" Dia. Cyclac® Yellow Plastic.

Flow Control: Internal 20 gpm Restrictor.

Valve: 1" NPT Female Brass, Chrome-Plated. Full Flow Self-Closing Valve.

Activator: 8" Dia. Stainless Steel Ring.

Stanchion: 1-1/4" IPS Steel Piping with Brass Fittings.

Inlet & Waste: 1-1/4" NPT Female.

Floor Flange: Brass Casting with (3) 17/32" Dia. Mounting Holes on 9" Dia. Bolt Circle, Spaced 120° apart.

Finish: DuraJade™

Shower Performance: 20 gpm @ 30 psi

EYEWASH: SE-505

Bowl: 300 series stainless steel

Spray Heads: (2) aerated yellow nylon spray outlets

Frost Proof Hydrant: 1" NPT female brass

Standard Bury Depth: 42"


Activator: 3/4" Dia. Brass Casted Handle

Inlet: 1" NPT female

Performance: 3.0 gpm @ 30 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

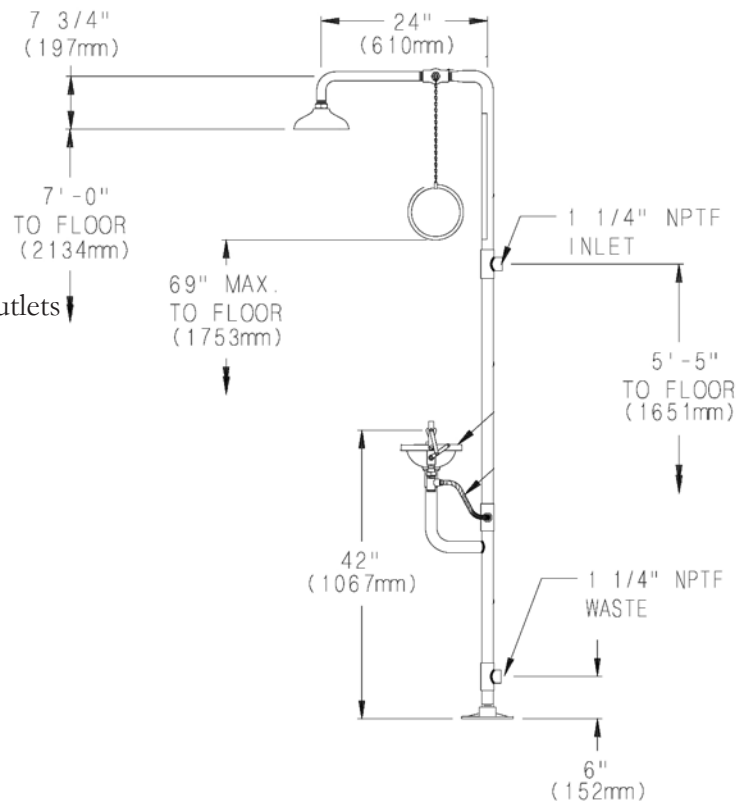

OPTIONS

- ☐ FLW Flow switch
- ☐ HS Hand-held spray
- ☐ XCH Extended chain
- ☐ PC Polished chrome showerhead
- ☐ BH Brass showerhead
- ☐ SSH Stainless steel showerhead
- ☐ FPV Anti-freeze protection valve
- ☐ SPV Anti-scald protection valve
- ☐ TS Top supply
- ☐ VPL Vapor proof light

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____