

SPEAKMAN®

SE-615

SAFE-T-ZONE® EMERGENCY SHOWER AND EYEWASH

DESCRIPTION


Floor mounted emergency deluge shower and aerated eyewash combination unit. Shower is supplied with a 1” NPTF self-closing full flow ball valve, activated by pull chain and ring. Eyewash is supplied with 1/2” NPTF stay-open full flow ball valve, activated by trigger bar.

SPECIFICATIONS

Showerhead: 8” Dia. Cylolac® Yellow Plastic
Flow Control: Internal 20 gpm Regulator
Valve: 1” NPT Female Brass, Chrome-Plated. Full Flow Self-Closing Valve
Activator: 8” Dia. Stainless Steel Ring
Stanchion: 1-1/4” IPS Steel Piping with Brass Fittings
Inlet & Waste: 1-1/4” NPT Female
Floor Flange: Brass Casting with (3) 17/32” Dia. Mounting Holes on 9” Dia. Bolt Circle, Spaced 120° apart
Finish: DuraJade™
Shower Performance: 20 gpm @ 30 psi

EYEWASH: SE-506

Bowl: Acrylic/PVC thermoplastic
Spray Heads: (2) yellow, plastic, aerated
Valve: 1/2” NPT female brass, chrome-plated
Activator: Stainless steel push handle
Inlet: 1/2” NPT female
Performance: 3.0 gpm @ 30 psi
Compliance: ANSI Z358.1
Universal Emergency Sign Included

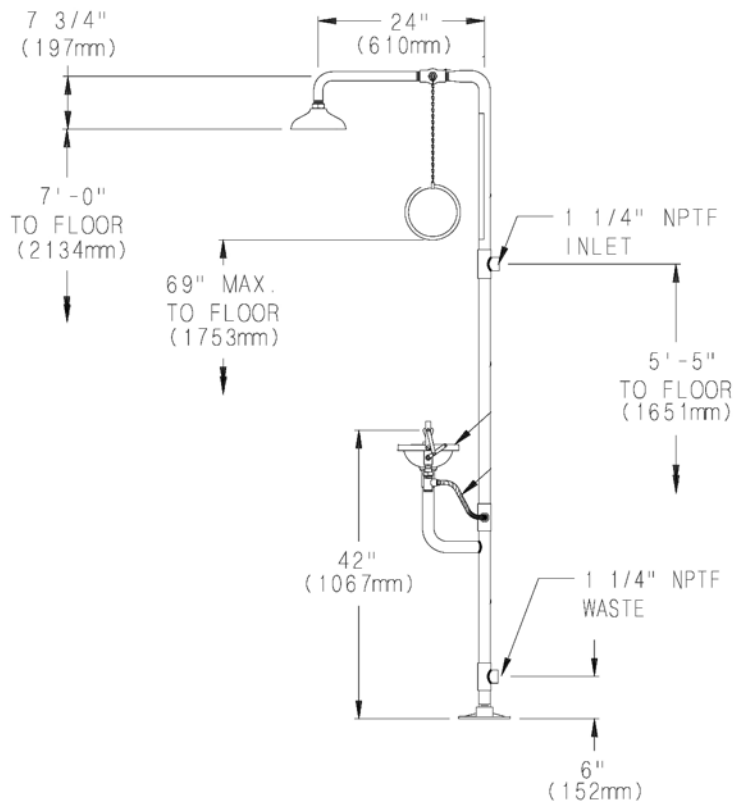

OPTIONS

- FLW Flow switch
- HS Hand-held spray
- XCH Extended chain
- PC Polished chrome showerhead
- BH Brass showerhead
- SSH Stainless steel showerhead
- FPV Anti-freeze protection valve
- SPV Anti-scald protection valve
- TS Top supply
- VPL Vapor proof light

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____