

# SPEAKMAN®

## SE-622

### COMBINATION SHOWER AND EYEWASH

#### DESCRIPTION


SE-622 Safe-T-Zone® features a combination eyewash with twin aerated sprays and a stainless steel bowl combined on a stainless steel stanchion with an impeller action deluge showerhead which is activated by a stainless steel pull rod.

#### SPECIFICATIONS

- Showerhead:** 8" diameter 300 series stainless steel
- Flow Control:** Internal 20 gpm regulator
- Valve:** 1" NPT female 300 series stainless steel.
- Full flow stay open ball valve
- Activator:** 300 series stainless steel triangular pull rod
- Stanchion:** 1½" stainless steel, 18 gauge tubing
- Inlet & Waste:** 1¼" NPT male
- Performance:** 20 gpm @ 30 psi.
- Finish:** Stainless steel
- EYEWASH: SE-505**
- Bowl:** 300 series stainless steel
- Spray Heads:** (2) aerated yellow nylon spray outlets.
- Valve:** ½" NPT female stainless steel. Full flow stay open ball valve
- Activator:** 300 stainless steel push handle
- Performance:** 3.0 gpm @ 30 psi.
- Compliance:** ANSI Z358.1
- Universal Emergency Sign Included**

#### OPTIONS

- 30GPM 30gpm regulator
- HFO Hand/Foot operation
- FPV Freeze protection valve
- SPV Scald protection valve
- FLW Flow switch
- HS Hand-held spray
- TS Top supply

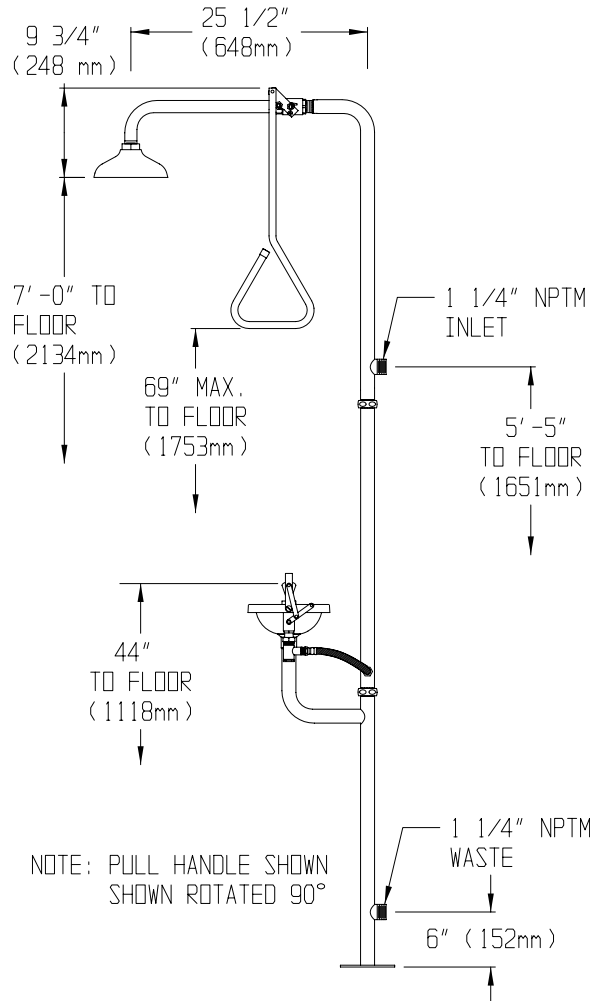

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____