SPEAKMAN®

SE-628

SAFE-T-ZONE® EMERGENCY SHOWER AND EYEWASH

DESCRIPTION

Floor mounted emergency deluge shower and aerated eyewash combination unit. Shower is supplied with a 1" NPTF stay open full flow ball valve, activated by triangular pull handle. Eyewash is supplied with ½" NPTF stay open full flow ball valve, activated by push handle.

SPECIFICATIONS

Showerhead: 8" diameter stainless steel
Flow Control: Internal 20 gpm restrictor
Valve: 1" NPT female stainless steel.
Full flow stay-open ball valve
Activator: Stainless steel triangular pull rod
Stanchion: 1½" stainless steel, 18 gauge tubing
Inlet & Waste: 1¼" NPT male
Finish: Stainless steel
Performance: 20 gpm @ 20 psi
EYEWASH: SE-580
Bowl: Yellow plastic
Spray Heads: (2) aerated yellow plastic spray outlets with flip-top dust caps
Valve: ½" NPT female stainless steel
Activator: Stainless steel push handle
Inlet: ½" NPT female
Performance: 3.6 gpm @ 30 psi
Compliance: ANSI Z358.1
Universal Emergency Sign Included

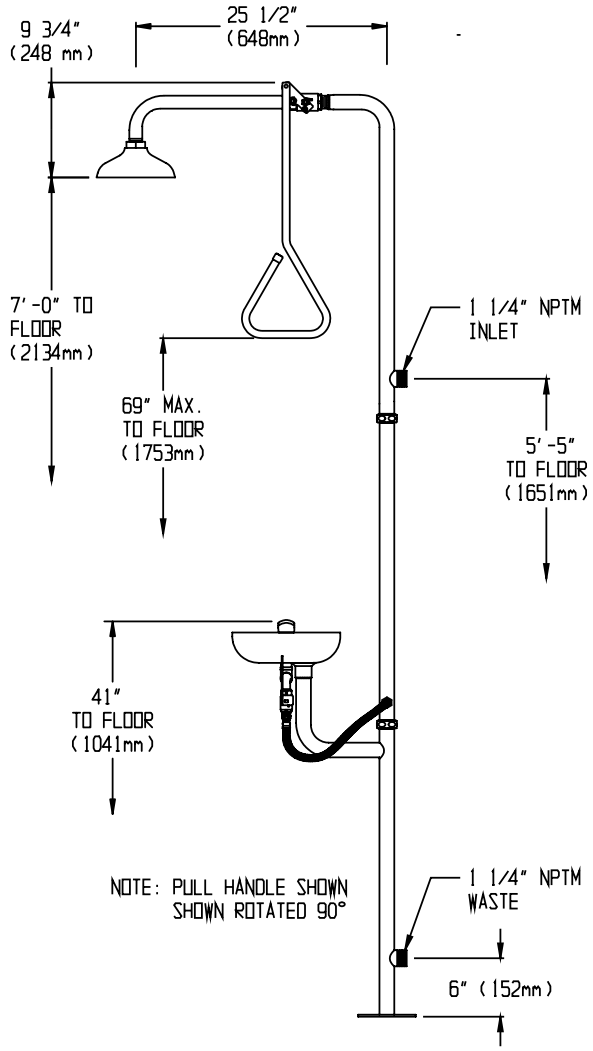

OPTIONS

- ❑ 30GPM — 30gpm regulator
- ❑ XPR — Extended pull rod
- ❑ FLW — Flow switch
- ❑ HS — Hand-held spray
- ❑ FPV — Freeze protection valve
- ❑ TS — Top supply
- ❑ SPV — Scald protection valve

Job Name_____
Location_____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date_____ Model # _____

41818

400 Anchor Mill Road, New Castle, DE 19720 USA
1-800-537-2107 | Fax: 1-800-977-2747
WWW.SPEAKMANCOMPANY.COM

Revision Date
MAR. 2011