

SPEAKMAN®

SE-7000-220V50C

HEAT TRACED COMBINATION SHOWER & EYE/FACE WASH

DESCRIPTION

SE-7000 Freeze protected combination shower and eye/face wash units are wrapped with heat trace cable and insulation and jacketed with an easy access shell to protect them to -50°F. Eye/Face wash features dual aerated spray outlets with automatic flow controls and flip top dust covers. The impeller action shower is activated by a high visibility yellow pull rod. An integral freeze valve protects unit from freezing in case of power outage. Power supply requirement is 220 VAC, 50 cycle, single phase.

SPECIFICATIONS

- Showerhead:** 8" Dia. CYCOLAC® yellow plastic
- Flow Control:** Internal 20 gpm regulator
- Freeze Valve:** Activates automatically below 40°F
- Valve:** 1" NPTF chrome plated brass stay-open ball valve
- Activator:** Powder coated high visibility yellow, aluminum triangular pull rod
- Internal Stanchion:** 1" IPS galvanized steel pipe
- Inlet:** 1" NPT male, bottom supply
- Performance:** 20 gpm @ 30 psi
- Finish:** Dura-Jade green plastic
- EYE/FACE WASH**

- Spray Head:** (2) yellow plastic spray outlets with automatic flow control and flip-top dust caps
- Valves:** ½" NPT brass, 3-way chrome plated ball valve
- Performance:** 3.82 gpm @ 30 psi
- Activator:** Stainless steel push handle
- ELECTRIC**


- Heating Tape:** Self-limiting parallel resistance cable with braided metal shield
- Thermostat:** Preset, hermetically sealed single pole contact switch. Temperature range 60° to 70° F
- Insulation:** Closed cell rubber foam
- Junction Box:** NEMA 4X water tight and dust tight, suitable for indoor or outdoor locations
- Power Supply:** 120 vac, 60 cycle, single phase
- Electrical Classification:** Class 1 Division 2 GRP. B, C, D
- Ground Fault Protection:** Installation will require minimum 30 mA GFPD
- Compliance:** ANSI Z358.1; Factory mutual approved

INTEGRAL OPTIONS

- 30GPM 30gpm regulator
- DH Drench hose
- IWT Immersion well thermometer
- SPV Scald protection valve
- PL Pilot Light

ACCESSORIES

- VPL Area light
- VPL-C1D2 Hazardous area light
- FLW Flow switch
- FLW-DPDT Flow switch - double pull double throw

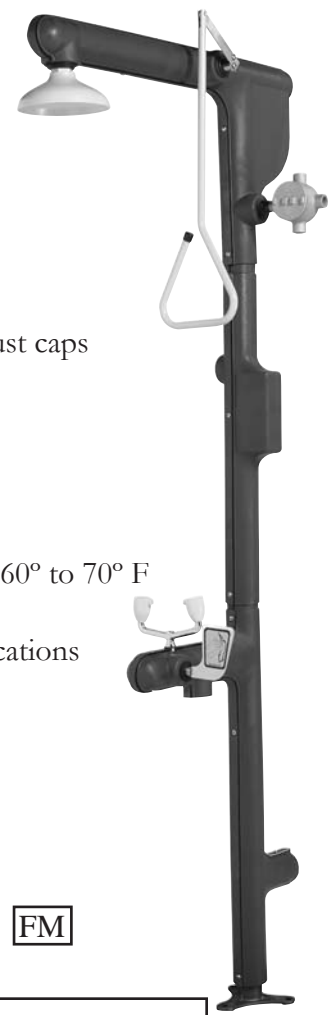

FM

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____