

SPEAKMAN®

SE-700

EYESAVER® LABORATORY EYEWASHES AND SHOWERS

DESCRIPTION

Deck mounted laboratory shower supplied with stay-open full flow ball valve, flange with riser for deck mounting, and shower head activated by pull lever.

SPECIFICATIONS

Showerhead: 5" Chrome-Plated Brass with Holes.

Valve: 3/4" NPT Female Brass, Chrome-Plated.

Activator: Brass Pull Lever, Chrome-Plated.

Riser: 3/4" Chrome-Plated Brass.

Inlet: 3/4" NPSM

Finish: Polished Chrome.


Performance: 30 gpm @ 30 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- ☐ FLW Flow switch
- ☐ FPV Anti-freeze protection valve
- ☐ SPV Anti-scald protection valve
- ☐ VPL Vapor proof light

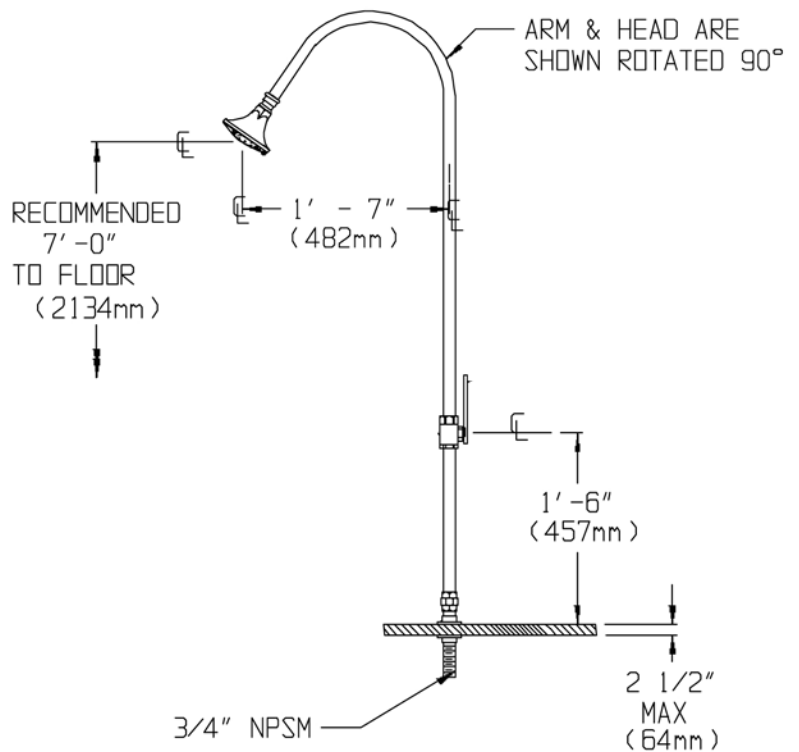

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____