

SPEAKMAN®

SE-TW-CU

STANCHION MOUNTED TEPID WATER SYSTEM

DESCRIPTION

Stanchion mounted Tepid Water System for use with emergency deluge shower and non-aerated eye/face wash combination unit. Shower is supplied with a 1” NPTF stay-open full flow ball valve, activated by triangular pull handle. Eye/face wash is supplied with 1/2” NPTF stay-open full flow ball valve, activated by push handle.

SPECIFICATIONS

Inlet: 1 1/4" NPT

Outlet: 1 1/4" NPT

Cold Water Inlet: 1 1/4" NPT Union

Tempered Water Outlet: 1 1/4" NPT Union


Capacity: 25 gpm @ 30 psi

Temp. Range: 70°-90°

Set Point: 85°

Performance: 9.55 gpm @ 30 psi

Compliance: ANSI Z358.1

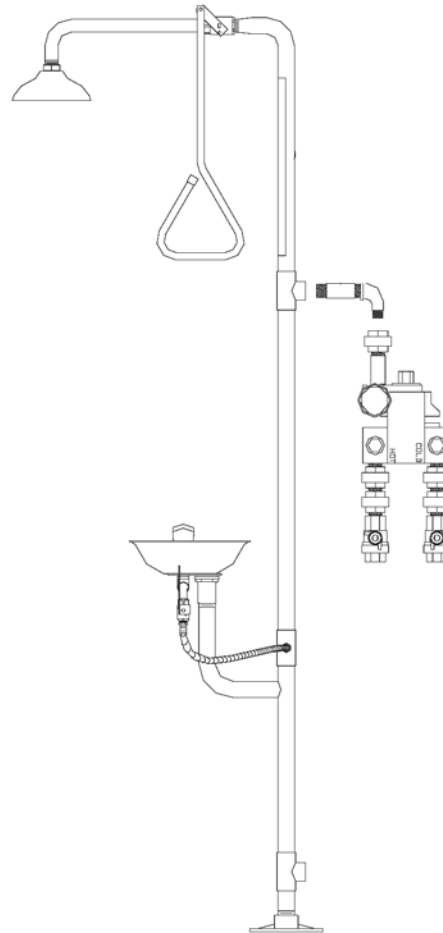

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____

50