

# SPEAKMAN®

## SEF-1800-CA-SL

### EYESAVER® FAUCET SPECIFICATIONS

#### DESCRIPTION

The SEF-1800-CA-SL Eyesaver® faucet combines a gooseneck faucet with an independently operated eyewash. The faucet features a vandal resistant, single lever faucet utilizing a ceramic cartridge with an adjustable temperature limit. Lead free brass construction.




#### SPECIFICATIONS

##### EYEWASH

- Activator:** Pull handle with graphics
- Spray heads:** (2) aerated yellow plastic spray outlets with flip-top dust caps
- Performance:** 2.6 gpm @ 30 psi
- Compliance:** ANSI Z358.1

##### FAUCET

- Supply:** 3/8" compression connections for hot and cold inlets
- Valve:** Ceramic cartridges covered by a 25-year warranty
- Finish:** Chrome plated brass
- Activator:** Lever
- Performance:** 2.2 gpm
- Counter thickness:** Up to 2" thick
- Compliance:** ASME A112.18.1, CSA B125-98 and CA AB1953
- Universal Emergency Sign Included**

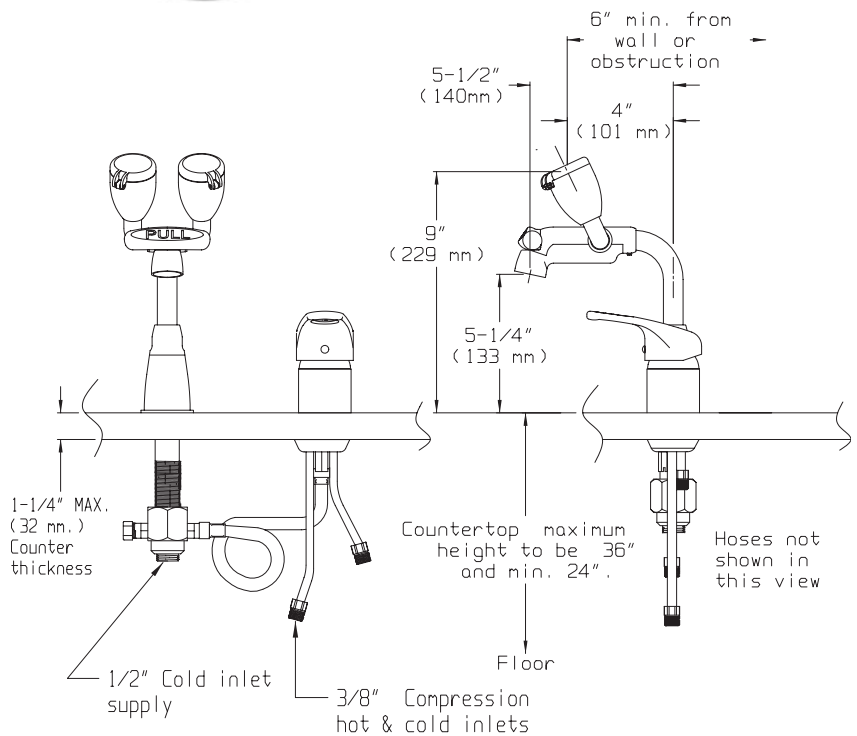

#### OPTIONS

- ADA 6" single lever handle
- BO Vandal resistant 0.5 gpm flow control
- CA Certified to no lead standard AB1953
- LF Laminar flow outlet 2.2 gpm
- ST\* Serrated tip with vacuum breaker
- TW Addition of SE-370 thermostatic mixing valve
- NA No aerated eyewash
- 8 8" gooseneck spout

\* Not available in Lead Free option

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____