

# SPEAKMAN®

## SEF-1826

### EYESAVER® FAUCET SPECIFICATIONS

#### DESCRIPTION

The SEF-1826 Eyesaver® faucet combines a sensor activated gooseneck faucet with an independently operated eyewash. The faucet features a 8" deck plate with thermostatic mixer and manual override valve while the eyewash offers twin aerated sprays and flip-top dust covers.

#### SPECIFICATIONS

##### EYEWASH

**Activator:** Pull handle with graphics

**Spray heads:** (2) aerated yellow plastic spray outlets with flip-top dust caps

**Performance:** 2.6 gpm @ 30 psi

**Approvals:** Meets ANSI Z358.1

##### FAUCET

**Supply:** 3/8" compression connections with male threads for hot and cold inlets

**Center Distance:** 4" (2 places)

**Activator:** Sensor AC powered

**Performance:** 2.2 gpm


**Counter thickness:** Up to 1 1/4" thick

**Approvals:** Meets ASME A112.18.1, CSA B125-98

**Universal Emergency Sign Included**

#### OPTIONS

- BO Vandal resistant 0.5 gpm flow control
- HS Two (2) Stainless steel flexible supply hoses to supply stops
- LF Laminar flow outlet 2.2 gpm
- NA No aerated eyewash
- ST Serrated tip with vacuum breaker
- TW Addition of SE-370 thermostatic mixing valve
- 8 8" gooseneck spout

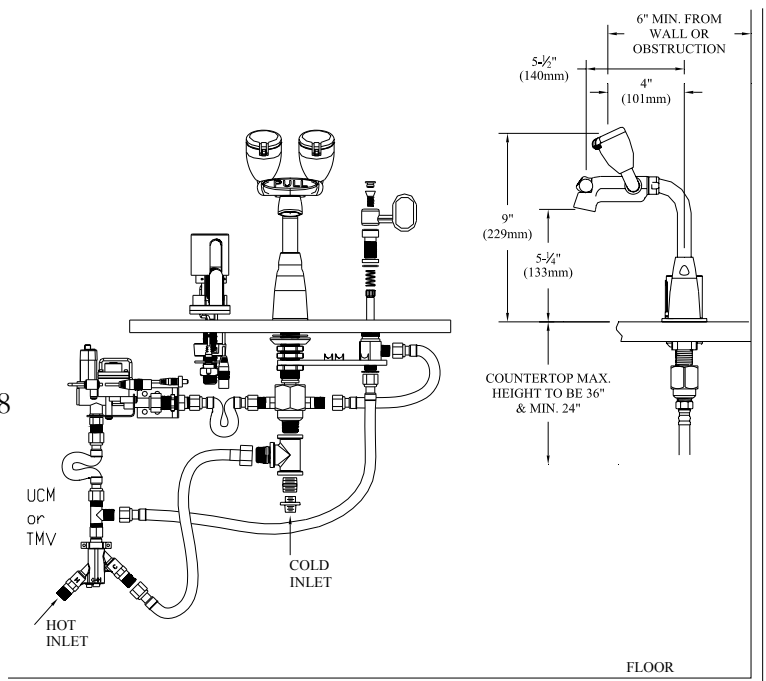

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____