

SPEAKMAN®

SEF-9000

EYESAVER® FAUCET SPECIFICATIONS

DESCRIPTION

The SEF-9000 Eyewash system is a combination Speakman eyewash/drench hose and a SC-5811 service sink faucet. This creative design allows the eyewash to be attached directly to the faucets cold water integral stop port and permits both units to be operated independently. As a result only one plumbing connection is required and with the built-in check valve there is never a worry about delivering scalding water to the eyes.

SPECIFICATIONS

EYEWASH

Supply: Speakman SC-5811-RCP service sink faucet's cold water integral stop port

Activator: Squeeze valve with automatic stay open device

Spray Heads: (2) yellow plastic spray outlets with flip-top dust caps

Performance: 2.4 gpm @ 30 psi

Backflow Prevention: Integral vacuum breaker and check valve

Compliance: ANSI Z358.1

SERVICE SINK FAUCET

Supply: 1/2" NPT female inlets

Activator: Vandal resistant four arm handles with color coded indexes

Cartridges: Perfect® valves with 1/4 turn ceramic cartridges covered by a 25-year warranty

Outlet: Cast brass nozzle with 3/4" hose thread, pail hook and top brace

Performance: 4 gpm (min) @ 20 psi


Backflow Prevention: Integral vacuum breaker

Compliance: ASME A112.18.1-2000 & CSA B125-98

Universal Emergency Sign Included

OPTIONS

- TW Addition of SE-370 thermostatic mixing valve
- FM Eyewash permanently fastened to wall, eliminating back flow prevention requirement

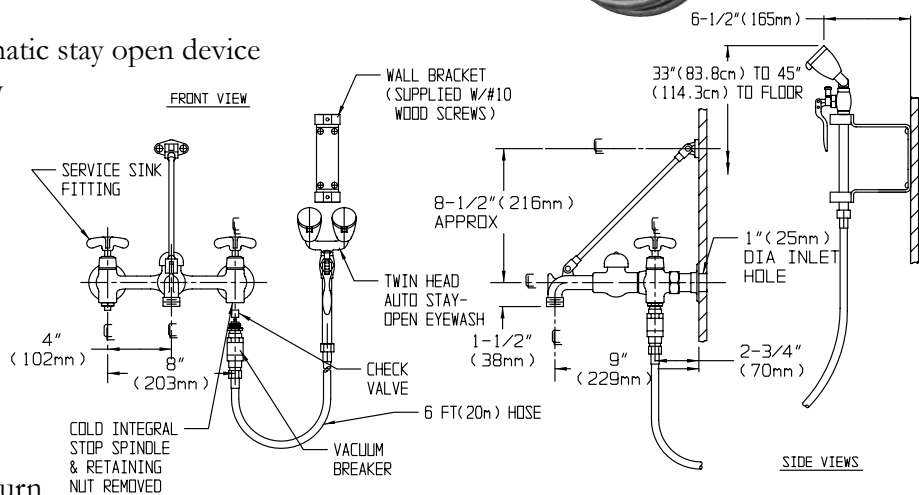

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____