SPEAKMAN®

VERSATILE

SM-4440



Shower Combination &

□ SM-4440

Versatile shower system includes Sentinel Mark II* concealed anti-scald balanced pressure valve with integral volume control/diverter and integral stops and hand held spray combination. Chrome plated brass wall plate with decorative etched metal index. Chrome plated brass lever handle. Independent center sleeve allows up to 1" of rough-in variation. Adjustable temperature limit stop. Brass body. Pressure balancing and ceramic temperature regulating cartridge with built-in check valves. Can be installed back-to-back. Roughing-in template. Four port valve with 1/2" female copper sweat inlets and shower outlet. 1/2 female NPT tub outlet. Furnished with 1/2" pipe plug. Chrome plated brass supply ell with wall flange. 69" square lock stainless steel hose with rubber liner. Swivel connector. In-line vacuum breaker. 30" chrome plated brass slide bar with mounting screws. VS-100-AF handshower with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum, to exceed existing ASME A112.18.1/CSA B125.1 standard. Non-positive shut-off meets ICC/ANSI A117.1 SEC. 608.6 and ADAAG. Meets ASSE 1016 & ASME 112.18.1/CSA B125.1.

OPTIONS


OFIIONS	
SUFFIX	DESCRIPTION
□ PC □ VH	VS-100-PC handheld shower, chrome finish 69" white vinyl hose



SPEAKMAN®

Rough-Ins

SM-4440

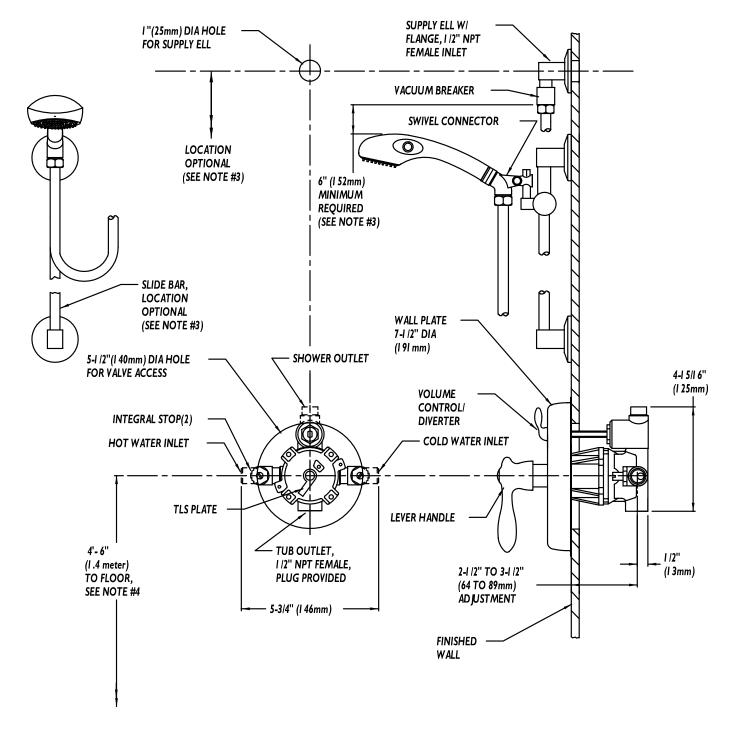

NOTE: All dimensions are in inches(millimeters) unless otherwise specified and are subject to change without notice. Unless otherwise specified all inlets and outlets are 1/2" female copper sweat. The locations of the slide bar and supply ell are optional, but restricted by the 69" hose length running from the supply ell connection to the hand shower and the 6" minimum requirement between the in-line vacuum breaker and top of the hand shower (hand shower adjusted to the highest position). For ADA mounting locations consult ADAAG, ANSI A117.1, or state 104 regulations.