
SPEAKMAN®

SHOWER ACCESSORIES CONTINUED

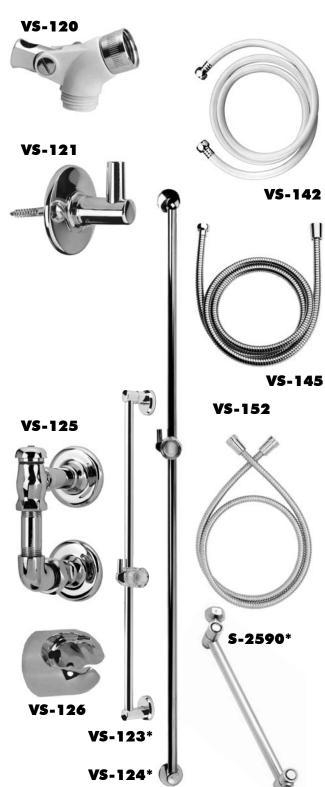

This space for Architect/Engineer approval.

□ S-2590*

Polished chrome plated 10" pivoting extension shower arm. Raises or lowers the shower arm over a 20" range. Key included to set adjustment. 1/2" NPT connections.

□ VS-120

White swivel connector. 1/2" NPSM inlet. 1/2" NPSF outlet.

□ VS-120-PC

Chrome plated swivel connector. 1/2" NPSM inlet. 1/2" NPSF outlet.

□ VS-121

Chrome plated brass wall mounted post for swivel connector. Chrome plated handheld shower hanger.

30" chrome plated brass slide bar with mounting screws.

□ VS-124*

42" chrome plated brass slide bar with mounting screws.

□ VS-125

Chrome plated brass elevated vacuum breaker assembly. 1/2" NPTM inlet and outlet. Vacuum breaker only is approved under ASSE 1001, CSA B64.1.1, and IAPMO. NOTE: Do not install in concealed locations or where slight spillage under certain service conditions might cause water damage. Avoid continuous pressure applications (shut off valve downstream of vacuum breaker).

□ VS-126

Speakman Versatile® chrome 2 position circular hand held wall mount with two (2) screws and two (2) anchors.

69" white vinyl reinforced hose. 1/2" NPSF chrome plated brass connectors.

□ VS-145

69" square lock stainless steel hose with rubber liner.

1/2" NPSF chrome plated connectors.

□ VS-152

Chrome 5' metal shower hose, 1/2" NPSF tangle free connectors.

SUFFIX	DESCRIPTION
□ BN	Brushed nickel (VS-126, VS-152 only)
□ PB	Polished brass (VS-126 only)

^{*} These products should not be used as grab bar.

