SPEAKMAN COMPANY S-3357 Installation, Maintenance & Operation Instructions

POP-UP LAVATORY DRAIN

DESCRIPTION

Speakman chrome plated brass pop-up lavatory drain. Brass cap and rubber seal. Vandal-resistant lift plug. Brass 1¹/₄" O.D. tailpiece.

SPECIFICATIONS

OUTLET SUPPLY: 1 ¼" O.D. SHIPPING WEIGHT: XXX LBS.

INSTALLATION

Unscrew guide plug assembly from tee/tube assembly. Remove locknut, fibre washer and rubber washer from guide plug assembly. Apply sealant around underside of flange on guide plug assembly.

Insert guide plug assembly through drain hole in sink and assemble rubber washer, fibre washer and locknut. Hand tighten locknut.

Insert fibre washer into tee/tube assembly. (Pipe dope can also be used with washer.) Assemble tee/tube assembly to guide plug assembly and tighten. Position ball rod hole so it faces back of lavatory and hold in place while wrench tightening guide plug locknut.

Insert lift plug assembly into guide plug hole with "Speakman" parallel with back of sink. From under sink insert o-ring, then ball rod into ball rod hole. (Make sure rod is in hole of lift plug.) Slip ball rod nut onto ball rod and tighten.

Insert lift rod through hole in fixture or nozzle. From under sink slip lift rod through holes in lift lever. Slide one side of spring clip onto ball rod. Select proper hole and slip lift lever onto ball rod. Bend other side of clip onto ball rod and slide into position. Adjust lift rod so that top of lift knob is ³/₄" from top of fixture or nozzle hole when drain is in open position. Tighten lever screw onto lift rod.

Remove tailpiece, apply pipe dope to threads and tighten tailpiece into drain assembly and install trap. Check drainage system for leaks.


OPERATION

Pull up on lift rod to close drain plug. Push lift rod down to open (lift) drain plug.

MAINTENANCE (CARE and CLEANING)

The finish of your SPEAKMAN lavatory drain can be cleaned by using mild soap and warm water.

ROUGH-IN MEASUREMENTS

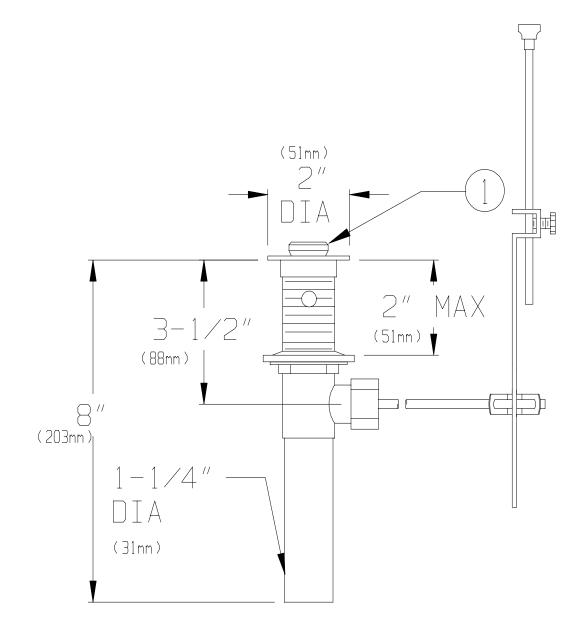

REPAIR / REPLACEMENT PARTS

DESCRIPTION

ITEM NUMBER PART OR GROUP NUMBER 1

RPG08-0038-PC

POP-UP PLUG WITH O-RING